























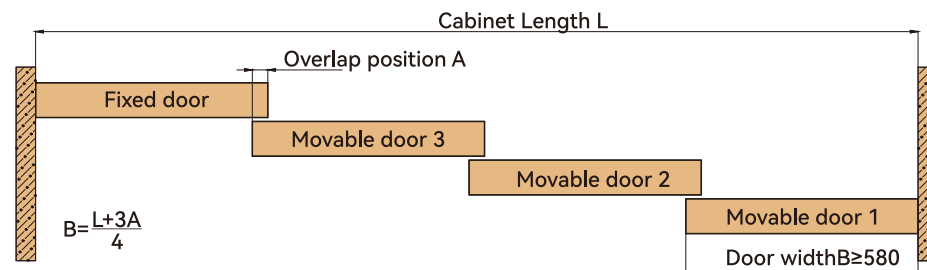


Accessories	Quantity	Accessories	Quantity
Linkage short guide roller 	2	Linkage long guide roller 	2
Damper with hanging part 	1	Top hanging plate 	1
linkage down guider 	2	Transmission belt 3 meter 	2
Belt supporting plate 	2	Top hanging plate (with M4*6 Outer hexagon screw) 	1
Damper stopper component 	1	Top hanging roller 	4
Door stopper 	5	Wooden door hanging plate 	6
ST3.5*12 Screw 	10	Wooden door down guiding roller 	1
4mm Allen key 	1	M4*12 Inner hexagon screw 	18
2mm Allen key 	1	M4*6 Screw 	4
2.5mm Allen key 	1	ST4*30 Self-tapping wooden screw 	30
Belt fixing part 	1	M5*12 Outer Hexagon Three Combination Screws 	2
Top hanging roller 	1	Soft closing Damper stopper 	1


Fixed door fittings need to be ordered separately

## 1. Door Dimension


### Installation instruction (3+1)




### Single track diagram




### Hanging box size and door slotting requirement

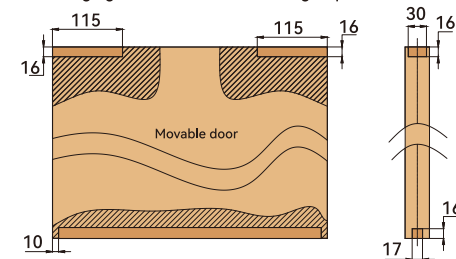


## 2. Rail accessory assembling

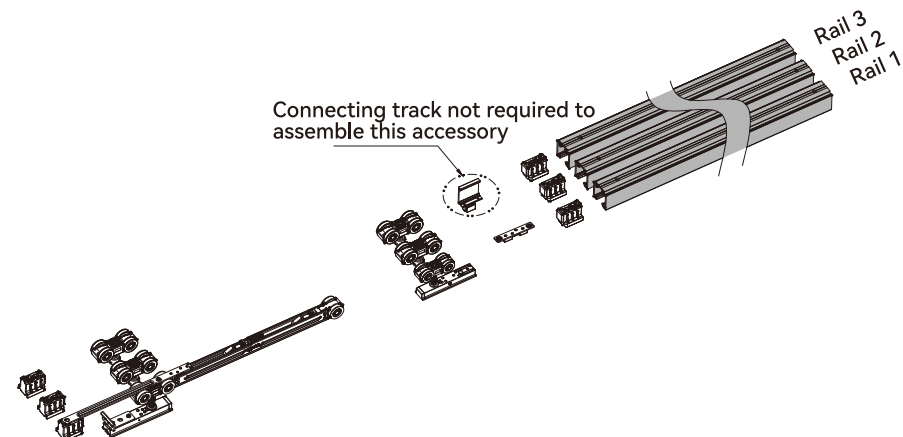


### 3. Rail and down location accessory assembling

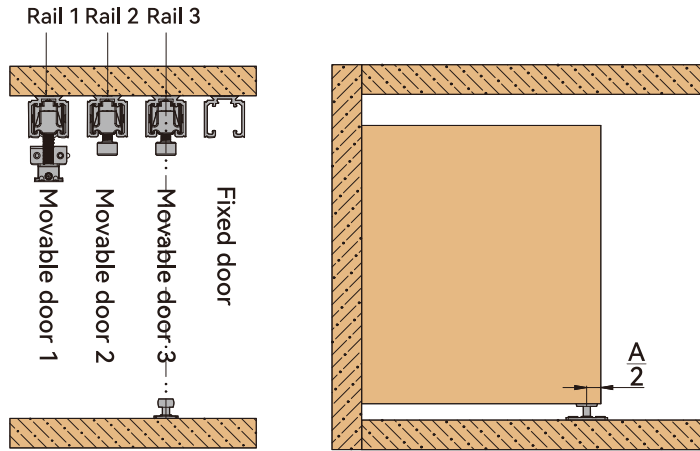


### 4. Door accessory assembling

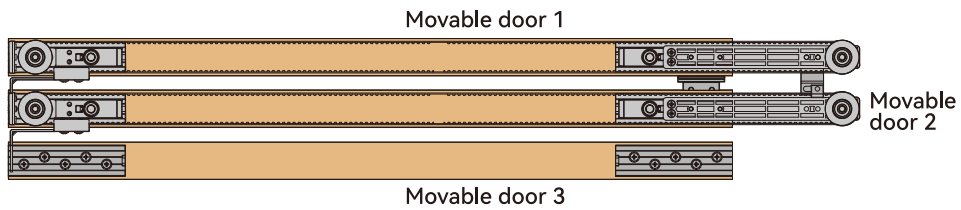


### 4.1 Assembling for Movable door's hanging box and down rail

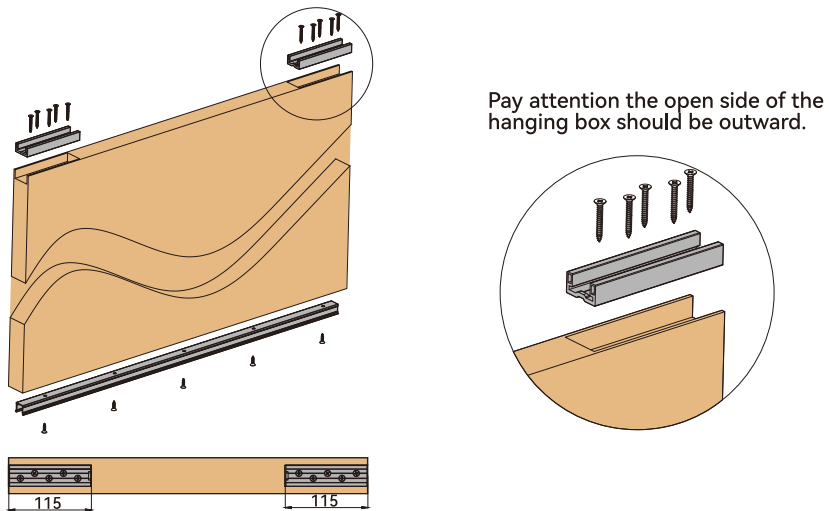


### 4.2 Movable door 2 Movable door 3 assemble the synthetic Linkage accessory

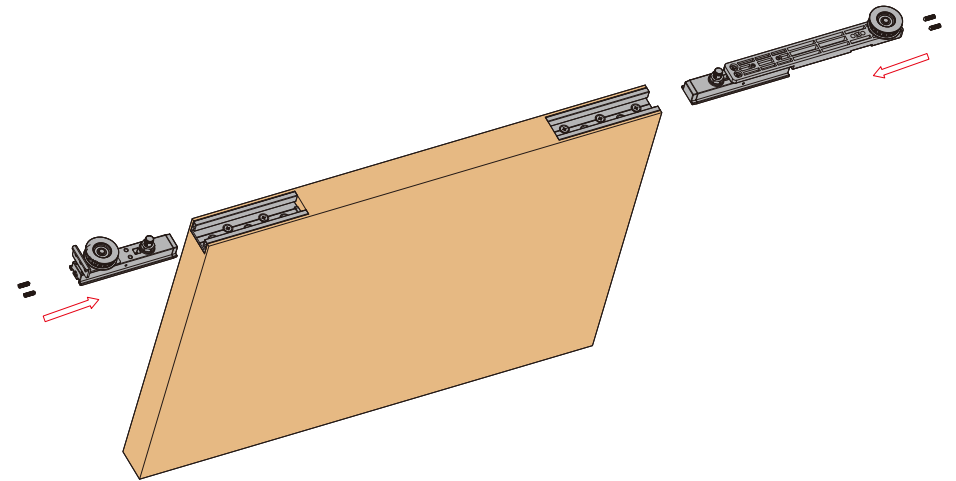

### 4.3 Movable door 2 and Movable door 3 assemble the belt supporting plate and adjust the belt until it is tight and cannot come off

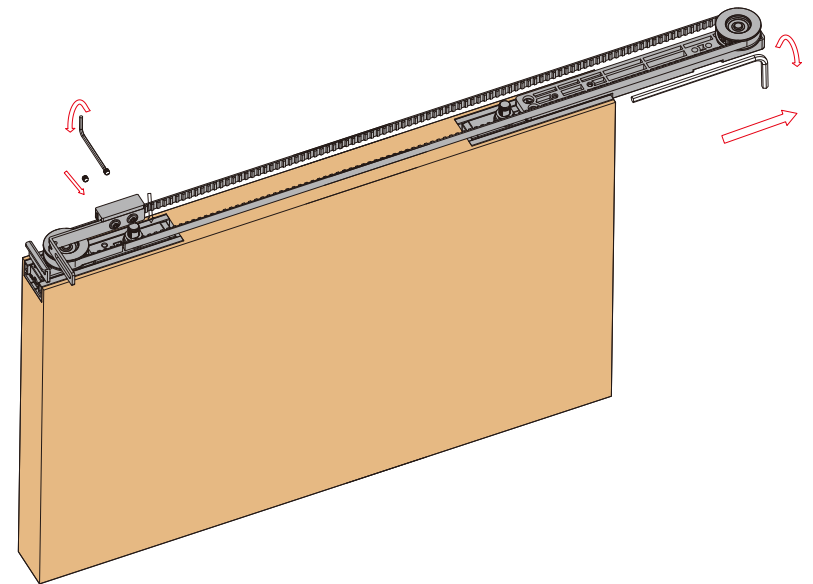


#### 4.4 Assemble the belt fixed plate on Movable door 2

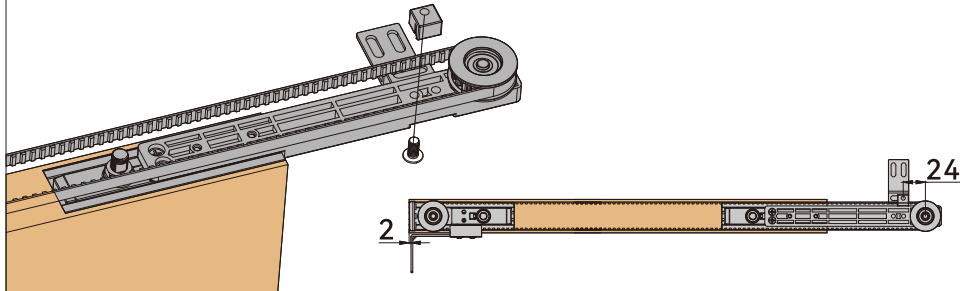


#### 4.5 Movable door 2 and Movable door 3 assemble the linkage down guider


Fix the down guider plate with self-tapping screw on the bottom of the door, please follow the below instruction for dimension reference.  
If the door open from right side, then the linkage down guider should assemble on the right side.  
If the door open from left side, then the linkage down guider should assemble on the left side.

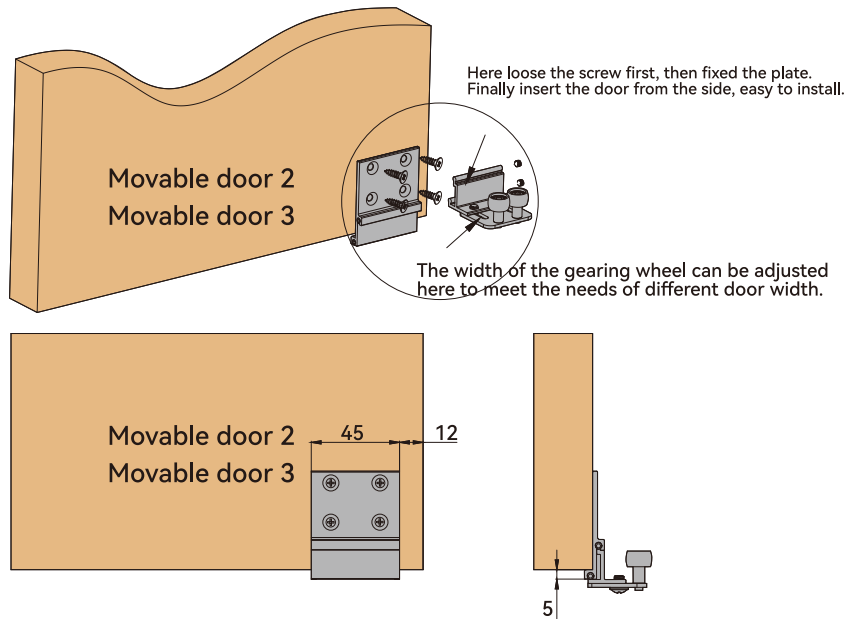

#### 5.1 Follow the below instruction to assemble the movable door 2

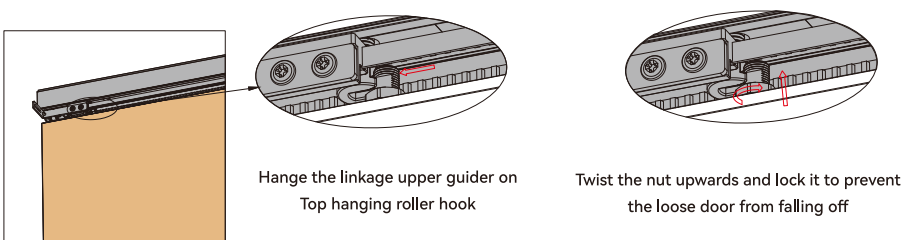


#### 5.2 Assemble the movable door 1




#### 6. Fixed the support plate

Connect the the movable door 3 top supporting plate with the movable door 2,  
Connect the the movable door 2 top supporting plate with the movable door 1




#### 7. Fixed Top belt hanging plate

7.2 Push all the doors flat and fix the support plate.



#### 8. Fixed Top hanging plate


Keep all the door on opening situation , then fixed the top belt mounting plate on the long transmission roller

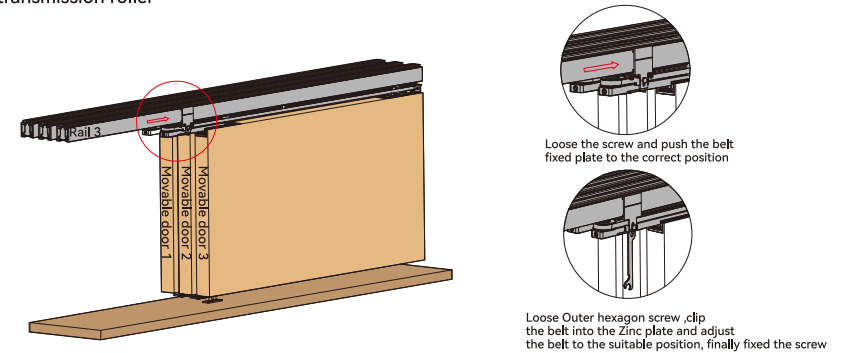

#### 9. Linkage down guider assemble instuction

9.1、Keep the door slightly out ,then clip the down guider roller on the rail

9.2. Push the down guider roller lock into the rail and fixed with screw



#### 10. Adjust the height of the door

Open and close the door to confirm the position of the damper stopper.  
Make sure both opening and closing door have the soft closing function, then fixed the damper stopper.  
Installation finished.

